



# E-Z DUNGEONS


## Standard Archway

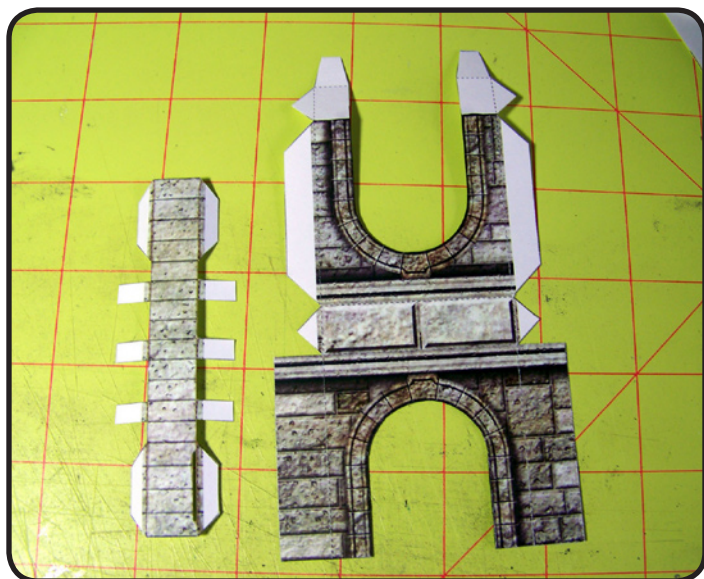


Cut, score and test fold the arch pieces as shown above.

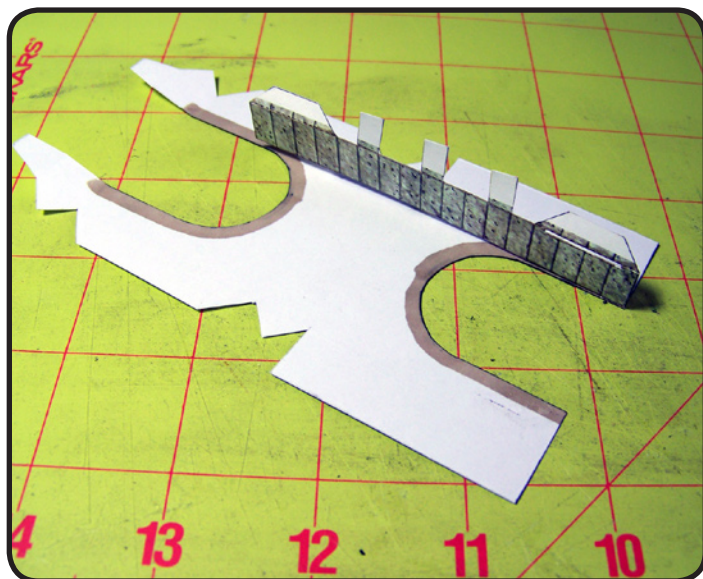

Start construction of the arch by gluing one end of the interior insert as shown above. Allow to fully dry before proceeding. When you are edging the pieces, make sure you edge the rear of the arch opening as shown above. Do NOT start with the tab that is adjacent to the slot opening.

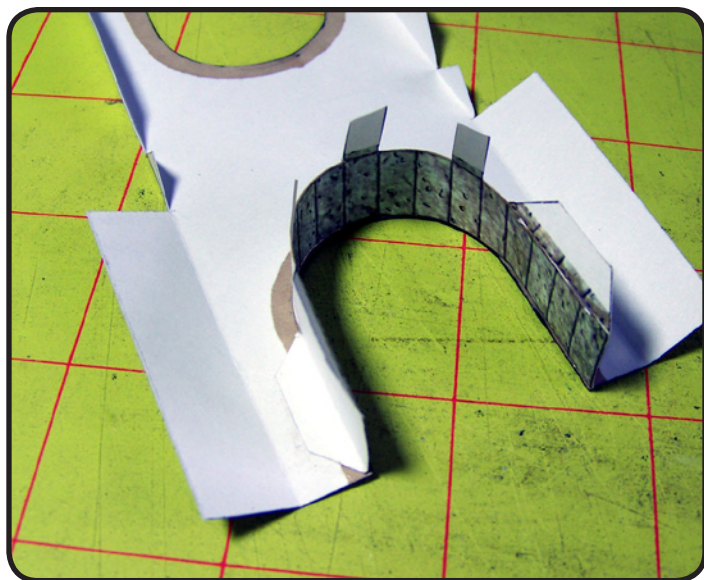


Glue the opposite end as shown, making sure you gently curve the top of the arch before you do. When both bottom tabs are dry, use a scrap piece of paper to apply glue to the upper tabs as shown above. Apply pressure with your fingers for a minute to keep the tabs in place and the arch properly flexed.

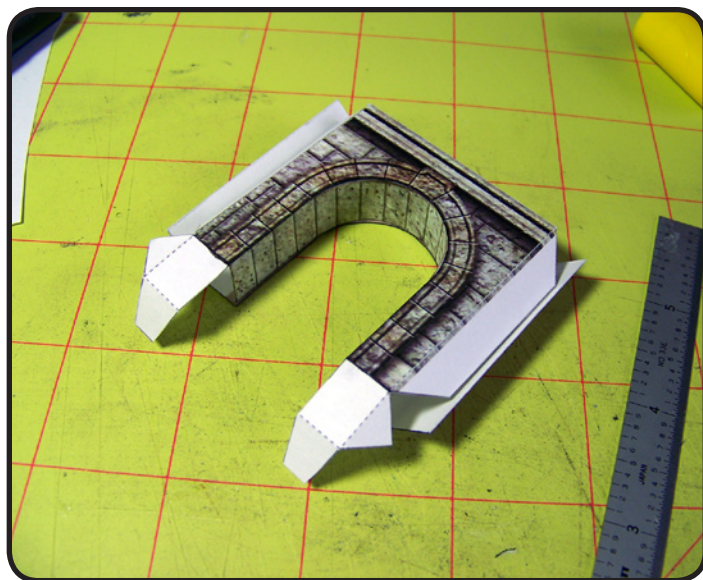


Fold the opposite face across and glue the two lower tabs. You can use a ruler to apply pressure on the interior tabs as shown.


# E-Z DUNGEONS

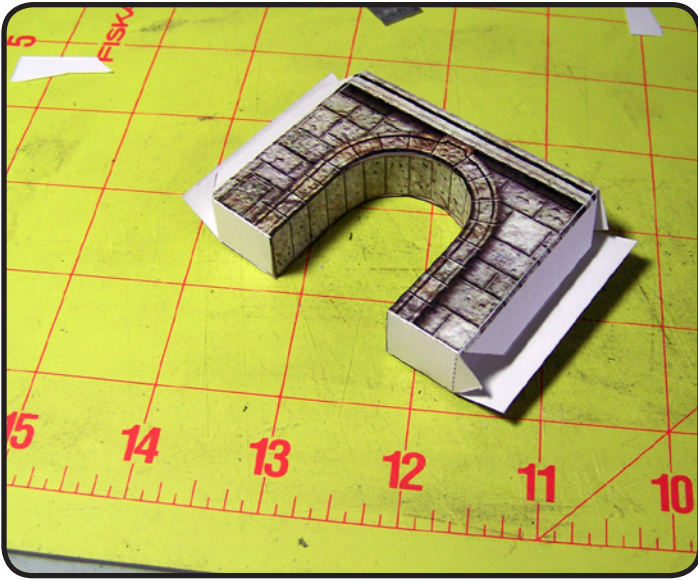

Next glue the two bottom flaps in place and allow to dry.

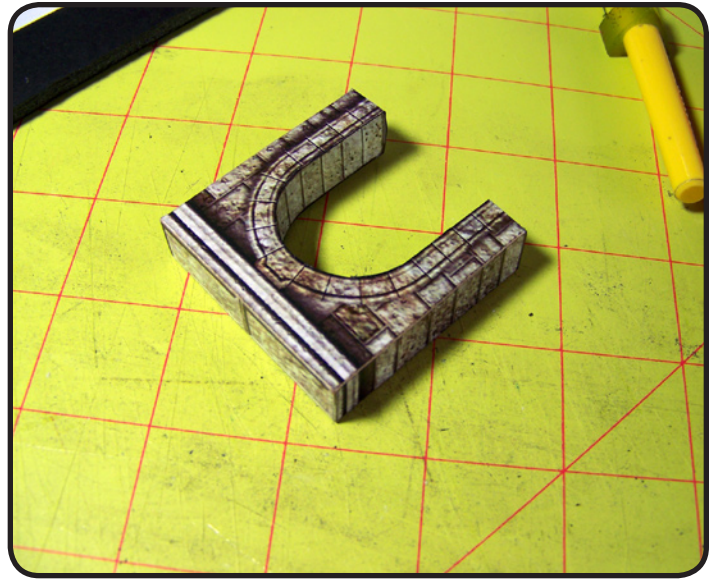

Finish the arch by gluing the side flaps in place.

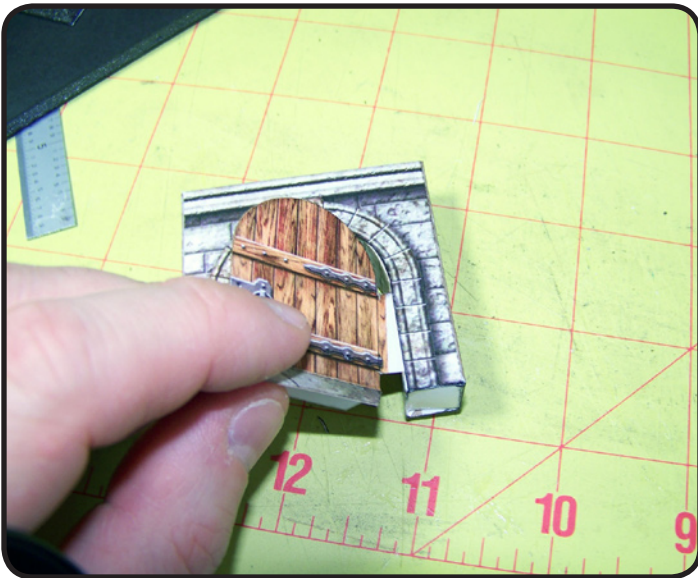

The door can be attached using our 'E-Z Hinge' door design by simply inserting the hinge into the slot on the interior of the arch. Some slight trimming of the 'E-Z Hinge' may be required, depending on how large you cut the slot opening. The bottom stability tabs on the doors are optional, and you can cut them off if you prefer (in fact, we recommend it).



You can now glue the arch to a base tile piece if desired.